

**Führungssäule für Schiebereinheit,
1-fach-Führung**

**Guide Pillar for Mold Slide Unit,
Single Guiding**

S6437/ . . .


Mat./Härte: 1.7225 / 670 HV0.5
Nitriertiefe: 0,3 mm

Mat./Hardness: 1.7225 / 670 HV0.5
Nitriding depth: 0,3 mm


Die Säule, Type B, wird nur zum Tuschieren des Schiebers verwendet.

The type B guide pillar is only used for slide spotting.

Type A



Type B

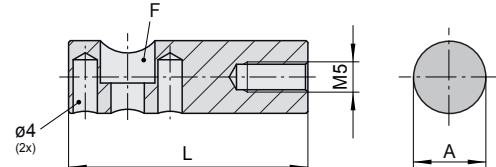

F	Type	A	L	Best. Nr. / Order No.
M5	A	12	20	S6437/ A / 12x20
M5	B	12	40	S6437/ B / 12x40